




## Turbine Wheel Flow Meter for liquids



measuring  
• monitoring  
• analysing

DPE



- Measuring ranges:  
5 - 30 ... 50 - 750 l/min water
- Measuring accuracy:  
± 2.5 % of full scale
- $p_{max}$ : PN 40,  $t_{max}$ : 80 °C
- Connection: G 1/2 ... G 3 female  
1/2" ... 3" NPT female
- Weld-on sleeves:  
DN 25 ... DN 80
- Material:  
brass, stainless steel
- Viscosity range:  
low viscous
- Output:  
pulses, 4 - 20 mA,  
LED display, contacts

S4

KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398  
info.de@kobold.com  
www.kobold.com

## Description

The KOBOLD flow meter model DPE is used for measuring and monitoring liquids. The device works according the well-known blade wheel principle. The six vane blade wheel is retained axially in a high quality sapphire bearing. The sensor is supplied ready-to-install with pipe fittings or with weld-on sleeves.

The blade wheel is set in motion by the flowing medium. Magnets are embedded hermetically sealed in the ends of the blade wheels. The magnets generate electrical pulses in a Hall-effect sensor mounted outside the flow area.

## Fields of Application

- cooling water monitoring
- general mechanical engineering
- waste water treatment
- all heavy goods industry
- chemical industry



## Technical Details

Measuring accuracy:	±2.5 % of full scale
Process temperature:	max. 80 °C
Ambient temperature:	max. 80 °C
Max. operating pressure:	PN40 / 20 °C
Max. pressure loss:	DPE-...05: 0.05 bar DPE-...10, ...15: 0.03 bar DPE-...20: 0.04 bar DPE-...25: 0.02 bar DPE-...30: 0.01 bar
Protection:	IP65

## Materials

Housing:	brass stainless steel 1.4581
Seals:	brass version: NBR Stainless steel version: FPM
Turbine wheel:	PVDF
Axle:	hard metal
Bearing:	sapphire

## Electronics

### ● Frequency output (..F300)

Power supply:	12-28 V <sub>DC</sub>
Power consumption:	10 mA
Pulse output:	PNP, open collector, max. 25 mA
Electr. connection:	plug connector M12x1

### ● Frequency output with frequency divider

Power supply:	24 V <sub>DC</sub> ±20 %
Power consumption:	15 mA
Pulse output:	PNP, open collector, max. 25 mA
Electr. connection:	plug connector M12x1

Division ratio: 1...1/128, factory set

### ● Analogue output (plug-on display option)

Power supply:	24 V <sub>DC</sub> ±20 %
Output:	0-20 mA or 4-20 mA, 2- or 3-wire
Max. load:	500 Ω
Electr. connection:	plug connector M12x1 or DIN 43 650
Option:	plug-on display (with plug connector DIN 43 650 and 4-20 mA output only)

### ● Compact electronics

Display:	3-digit LED
Analogue output:	(0)4...20 mA adjustable, max. 500 Ω
Switching outputs:	1 (2) semiconductor PNP or NPN, factory set
Contact operation:	N/C / N/O contact, frequency programmable
Setting:	with 2 buttons
Supply:	24 V <sub>DC</sub> ±20 %, 3-wire, approx. 100 mA
Electr. connection:	plug connector M12x1

### ● ADI electronics

Display:	bar graph and 5-digit digital display
Analogue output:	(0)4...20 mA, 0-10 V <sub>DC</sub>
2 switching outputs:	relay /changeover contact, max. 250 V <sub>AC</sub> /5 A resistive load, max. 30 V <sub>DC</sub> / 5 A
Setting:	via 4 buttons
Supply:	100...240 V <sub>AC</sub> ±10 % or 18...30 V <sub>AC</sub> /10...40 V <sub>DC</sub>
Electr. connection:	pluggable terminal block via cable gland

### ● DPE-...Exxx (Counter electronic)

Display:	LCD, 2 x 8 digit, illuminated total, part and flow quantities, units selectable
Analogue output:	0(4)...20 mA adjustable
Load:	max. 500 Ω
Switching outputs:	2 relays, max. 250 V/5 A/1000 VA
Settings:	via 4 buttons
Functions:	Reset, Min./Max. memory, flow monitor, monitoring for part and total quantity, language
Supply:	24 V <sub>DC</sub> ±20 %, 3-wire
Power consumption:	approx. 170 mA
Electr. connection:	pluggable screw terminals via cable gland

### ● DPE-...Gxxx (Dosing electronic)

Display:	LCD, 2 x 8 digit, illuminated total, part and flow quantities, units selectable
Analogue output:	0(4)...20 mA adjustable
Load:	max. 500 Ω
Switching outputs:	2 relays, max. 250 V/5 A/1000 VA
Settings:	via 4 buttons
Functions:	dosing (relay S2), start, stop, reset, fine dosing, correction amount, flow switch, total quantity, language
Supply:	24 V <sub>DC</sub> ±20 %, 3-wire
Power consumption:	approx. 170 mA
Electr. connection:	pluggable screw terminals via cable gland

See data sheet ADI-1 for more technical details on ADI evaluating electronics.

## Order Details (Example: DPE-1105 G4 F300)

With pipe fittings							Evaluating electronics			
Measuring range max. 3 m/s		Flow rate max. 10 m/s approx. [l/min water]	Model		Connection		Frequency output			
[l/min water]	approx. Frequenz [Hz] at FS	Material brass	Material st. steel	Standard female	Special female	..F300 = frequency output, plug connector M12 x 1 ..F320 = frequency divider 1: 2, plug connector M12 x 1 ..F340 = frequency divider 1: 4, plug connector M12 x 1 ..F390 = frequency divider 1... 1/128, plug connector M12 x 1				
5-30	80	100	DPE-1105..	DPE-1205..	..G4..=G 1/2	..N4..=1/2 NPT	..L303 = 0-20 mA output, 3-wire, M12 x 1 plug connector ..L342 = 4-20 mA output, 2-wire, M12 x 1 plug connector ..L343 = 4-20 mA output, 3-wire, M12 x 1 plug connector ..L442 = 4-20 mA output, 2-wire, plug connector DIN 43 650			
10-50	80	180	DPE-1110..	DPE-1210..	..G5..=G %	..N5..=% NPT	..C30R = LED display, 2 x open collector, PNP, plug connector M12 x 1 ..C30M = LED display, 2 x open collector, NPN, plug connector M12 x 1 ..C34P = LED display, 4-20 mA, 1 x open collector PNP, plug connector M12 x 1 ..C34N = LED display, 4-20 mA, 1 x open collector NPN, plug connector M12 x 1			
20-80	65	230	DPE-1115..	DPE-1215..	..G6..=G 1	..N6..=1 NPT	..Compact electronic*			
25-250	140	600	DPE-1120..	DPE-1220..	..G8..=G 1 1/2	..N8..=1 1/2 NPT	..E34R = LCD, 0(4)-20 mA, 2 x relays			
30-350	135	1000	DPE-1125..	DPE-1225..	..G9..=G 2	..N9..=2 NPT	..C34R = Dosing electronics			
50-750	110	1600	DPE-1130..	DPE-1230..	..GB..=G 3	..NB..=3 NPT	..G34R = LCD, 0(4)-20 mA, 2 x relays			
With installation adapter not available with compact / ADI electronics							Counter electronics			
Meas. range [m/s]	approx. frequency [Hz] at max. value	max. flow rate [m/s]	Model		Connection for nominal pipe size		Display	Supply	Output	Contacts
0-3	65 (at DN 25) 140 (at DN 40) 135 (at DN 50) 110 (at DN 80)	10	-	DPE-1200..	..W6.. = DN 25 ..W7.. = DN 40 ..W8.. = DN 50 ..WB.. = DN 80	K=bar graph/ digital display	0=100-240 V <sub>AC/DC</sub> 3=18-30 V <sub>AC</sub> , 10-40 V <sub>DC</sub>	0=without 4=0(4)-20 mA, 0-10V	0=without 4=0(4)-20 mA, 0-10V	2=2 change- over contacts

\* Please specify flow direction in writing.

**Plug-on display**

for model DPE...L442 (with 4-20 mA output and DIN connector)





Description	Order number
4-digit LED, connector DIN 43650, 2-wire, supply through analogue output	AUF-1000
as above however with additional open collector output	AUF-1001

**Weights**


Sensor

Electronics

Model	Weight	Model	Weight
1/2"	approx. 750 g	Frequency output	130 g
3/4"	approx. 1050 g	Analogue output	130 g
1"	approx. 900 g	Compact electronic	approx. 650 g
2"	approx. 1500 g	ADI electronics	1400 g
3"	approx. 3000 g	E/G electronics	1400 g

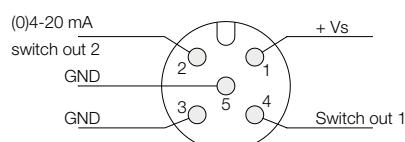
**Electrical connection**
**DPE-..F., DPE-..L3..3-wire**

**DPE-..L342 2-wire**

**DPE-..C..**

**DPE-..L442**


- 14 — Control 1
- 13 — Control 1 - GND
- 12 — Control 2
- 11 — Control 2 - GND
- 10 — Analogue GND
- 9 — Analogue 10 V
- 8 — Analogue 20 mA
- 7 —
- 6 —
- 5 —
- 4 — GND
- 3 — f-Input Namur
- 2 — f-Input NPN
- 1 — f-Input PNP

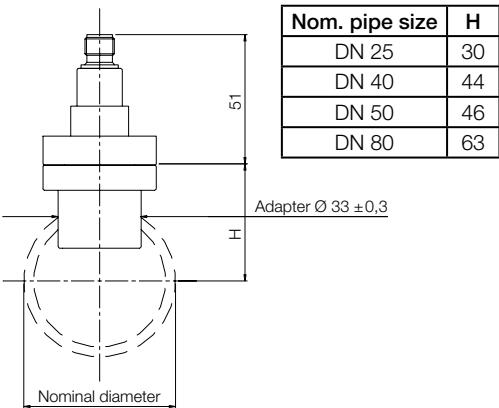


## Dimensions

**Model: DPE-..W..** (with weld-on sleeve)




**Model: DPE-..L4..**


(with analogue output and plug-on display option)

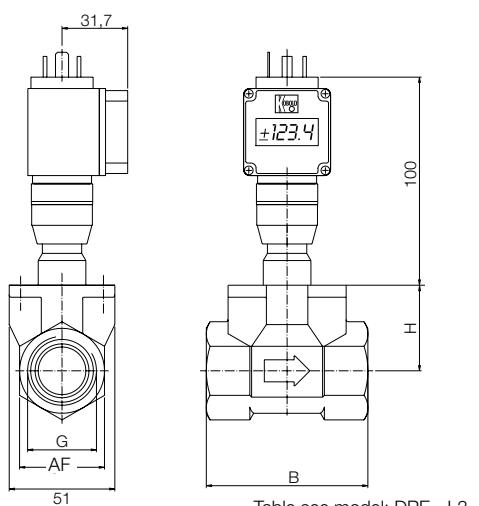

**Model: DPE-...L3.. / DPE-..F..** (with analogue output)

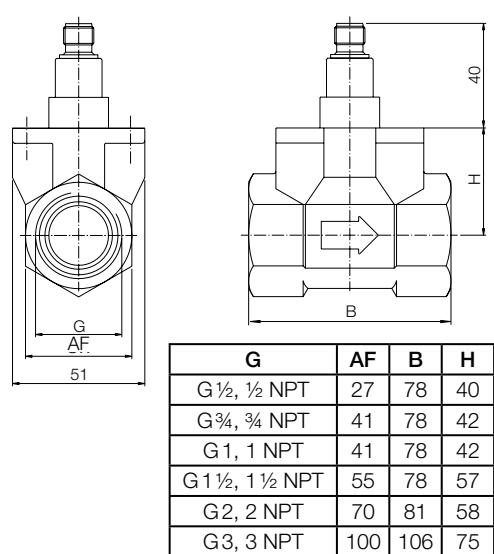

**Model: DPE-..C..** (with compact electronic)

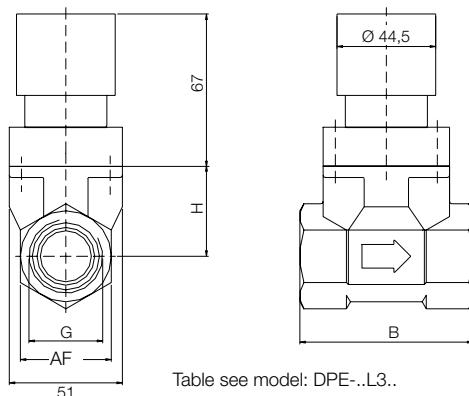

**Model: DPE-..K.., ..G.., ..E..**

(with ADI evaluating, counter or dosing electronic)

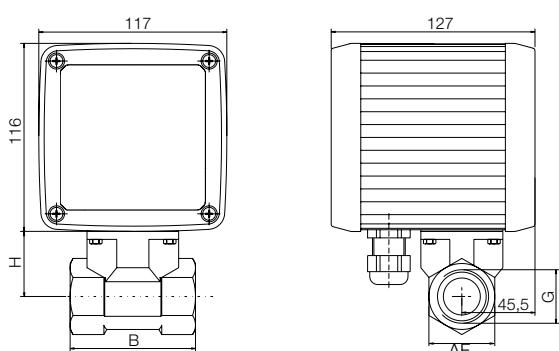


Table see model: DPE-..L3..